

E 6050 LM

DTH240



L A R G E D I A D T H K I T



E 6050LM

DTH240

L A R G E D I A D T H K I T

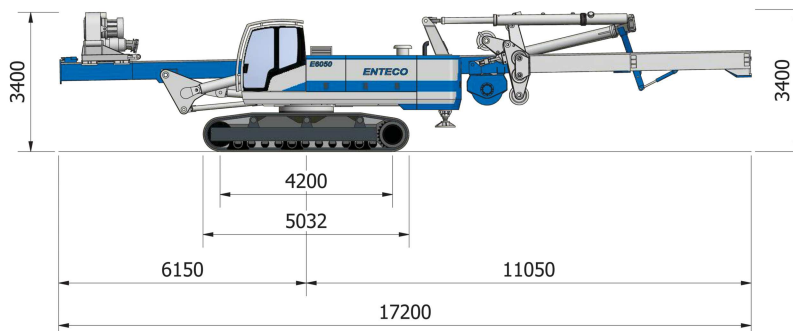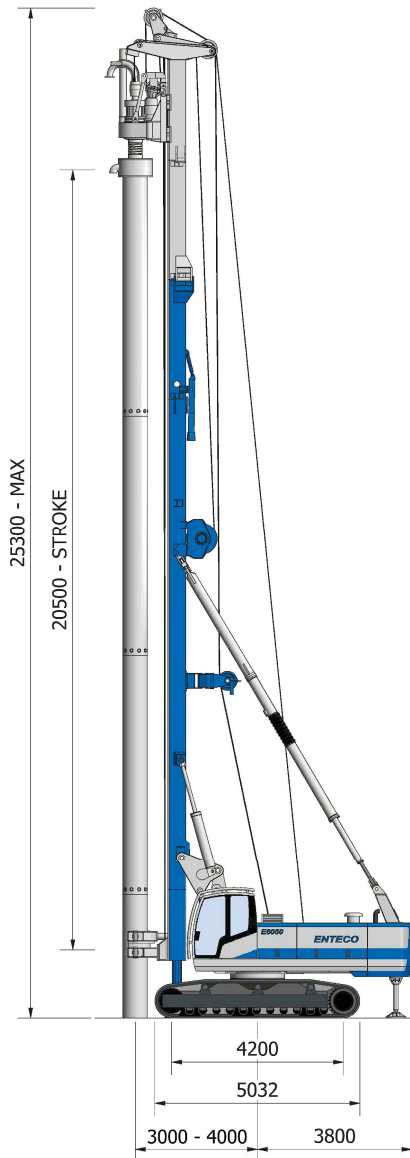

E 6050LM - DTH240 LARGE DIA DTH KIT

OPERATING WEIGHT	ton	up to 59
Drilling diameter	mm	up to 1000
Max drilling depth (single passage)	m	20

MAST

Front/Rear inclination	+4°/-15°
Side inclination	±4°

CROWD SYSTEM

WINCH

Rotary stroke	mm	20500
Crowd force	kN	200
Extraction force	kN	530

ROTARY

Model	ENTECO RH41/2	
Max torque	kNm	245
Max drilling speed	rpm	39+60

E 6050LM - BASE MACHINE

CRAWLERS

STANDARD

OPTION

Overall width	mm	3000+4200	3200+4400
Track pads	mm	700	900
Crawler drive speed	km/h	2.1	2.1

DIESEL ENGINE

Model	CATERPILLAR	C9 ACERT
Rated power	HP/kW	350/261
Fuel tank capacity	litres	400

MAIN WINCH

Max line-pull 1st layer	kN	165
Free-fall device		option

AUXILIARY WINCH

STANDARD

OPTION

Max line-pull 1st layer	kN	50	70
Free-fall device		option	option



Via dell'Artigianato, 33 - Z.I. - 30020 Fossalta di Piave - VENEZIA - ITALIA
 Tel +39 0421 67.99.77 - Fax +39 0421 67.99.93 - e-mail: info@entecodrill.com - www.entecodrill.com